



Flamco

Your reliable partner

BEST SEPARATION • SAVES ENERGY • LOW MAINTENANCE

Flamcovent Clean Smart

COMBINING OPTIMAL PERFORMANCE WITH ENERGY CONSERVATION

ANSI FLANGE CONNECTION SIZES

2½" - 24"

AVAILABLE IN ASME / NON-ASME



a smart concept

Get rid of air and dirt

Air and dirt in a system causes problems such as reduced heat transfer, unnecessary faults, wear, noise and can lead to disruptions of the system and reduced pump performance. Higher energy consumption and an unreliable system are the consequence.

Where does air and dirt come from?

Air particles and gases are always present in the water of hydronic heating and cooling systems. They are generally a consequence of activities performed (maintenance, draining and filling etc.), micro-leaks, diffusion and chemical processes in the water.

Dirt is caused by corrosion processes, maintenance to the system or failing system parts. It can accumulate and cause blockages. The use of filters is not ideal because these do not trap smaller particles, silt up, cause high flow resistance, need regular maintenance and require replacement of components.

Main advantages


- Low maintenance
- Up to 60% better performance compared to conventional air & dirt separators
- Standard flow velocities up to 9.8 ft/s
- Max working pressure: 150 PSI
- Min/max working temperature: 14°F - 250°F
- Extremely low flow resistance resulting in the best energy conservation possible
- Consistent performance throughout its service life
- 5 year warranty

Air and dirt in a system lead to:

- Shortened system-life due to corrosion
- Reduced comfort due to less heat transfer and noises
- Cavitation and magnetite damage to pumps
- Disruptions of the system
- Loss of image for installers and component suppliers

Flamco has the answer

The new Flamcovent Clean Smart air and dirt separator range removes even the smallest microbubbles and minuscule dirt particles from the system water. They are close to maintenance-free and the flow resistance is negligibly low, which saves energy.

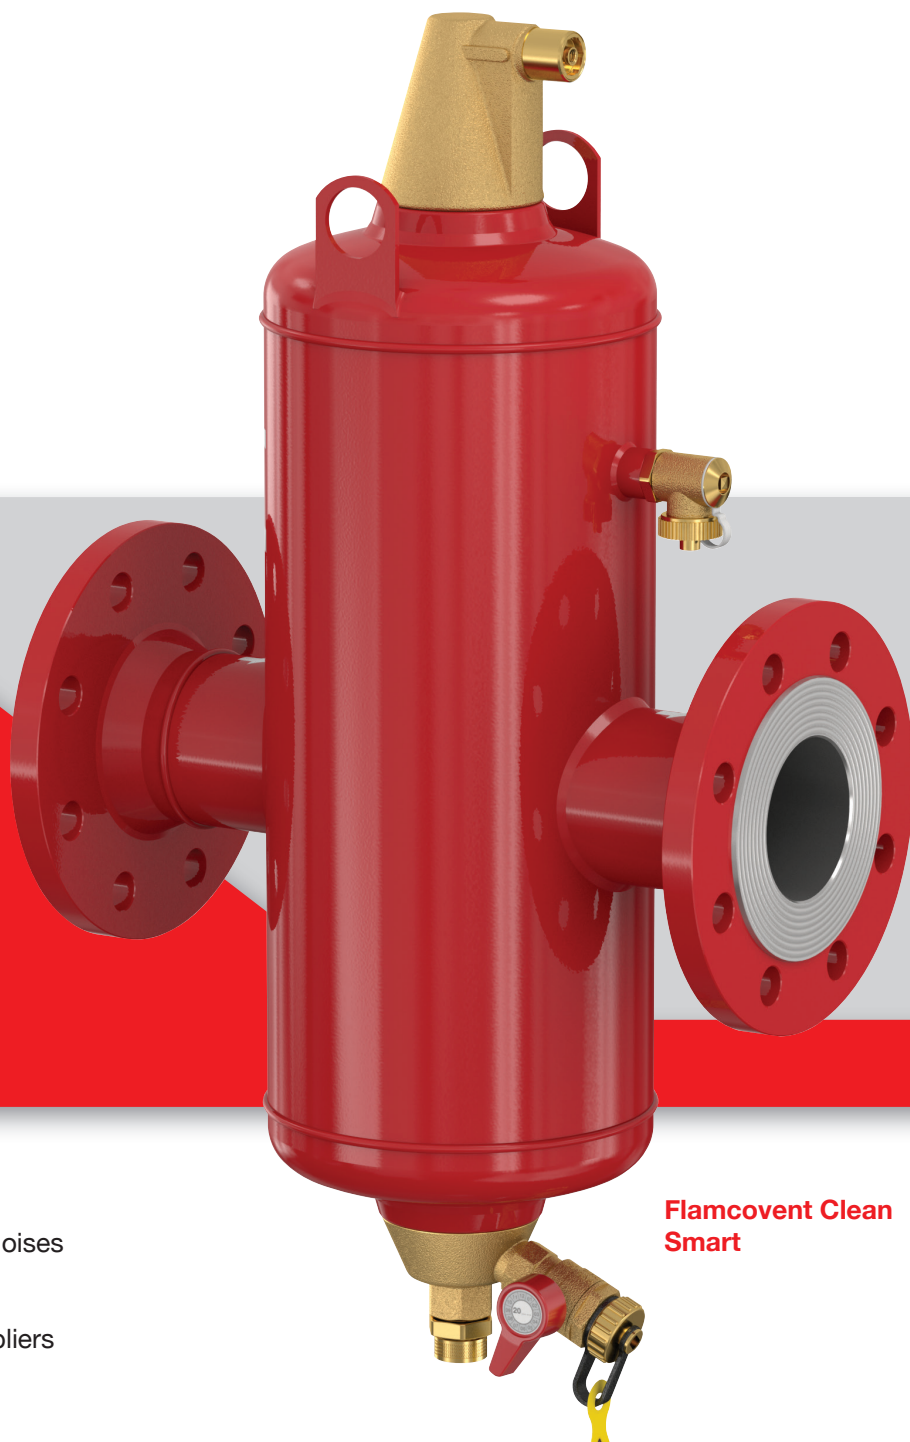

Flamcovent Clean Smart


groundbreaking innovation

High separation performance with energy conservation

The separation element combined with the return flow ensures excellent air and dirt separation and at the same time saves energy because of the negligible flow resistance. An exceptional rate of at least 40% of the air and dirt is separated per cycle while using only 10% extraction of the main flow.

Inside the chamber of the separator the water velocity is heavily reduced down to less than 1% of the main flow.

This efficiently separates microbubbles and dirt particles by allowing the air particles to automatically rise to the air release valve at the top and the dirt particles to sink to the bottom to the dirt collector. A supermagnet additionally contributes in trapping ferrous particles.

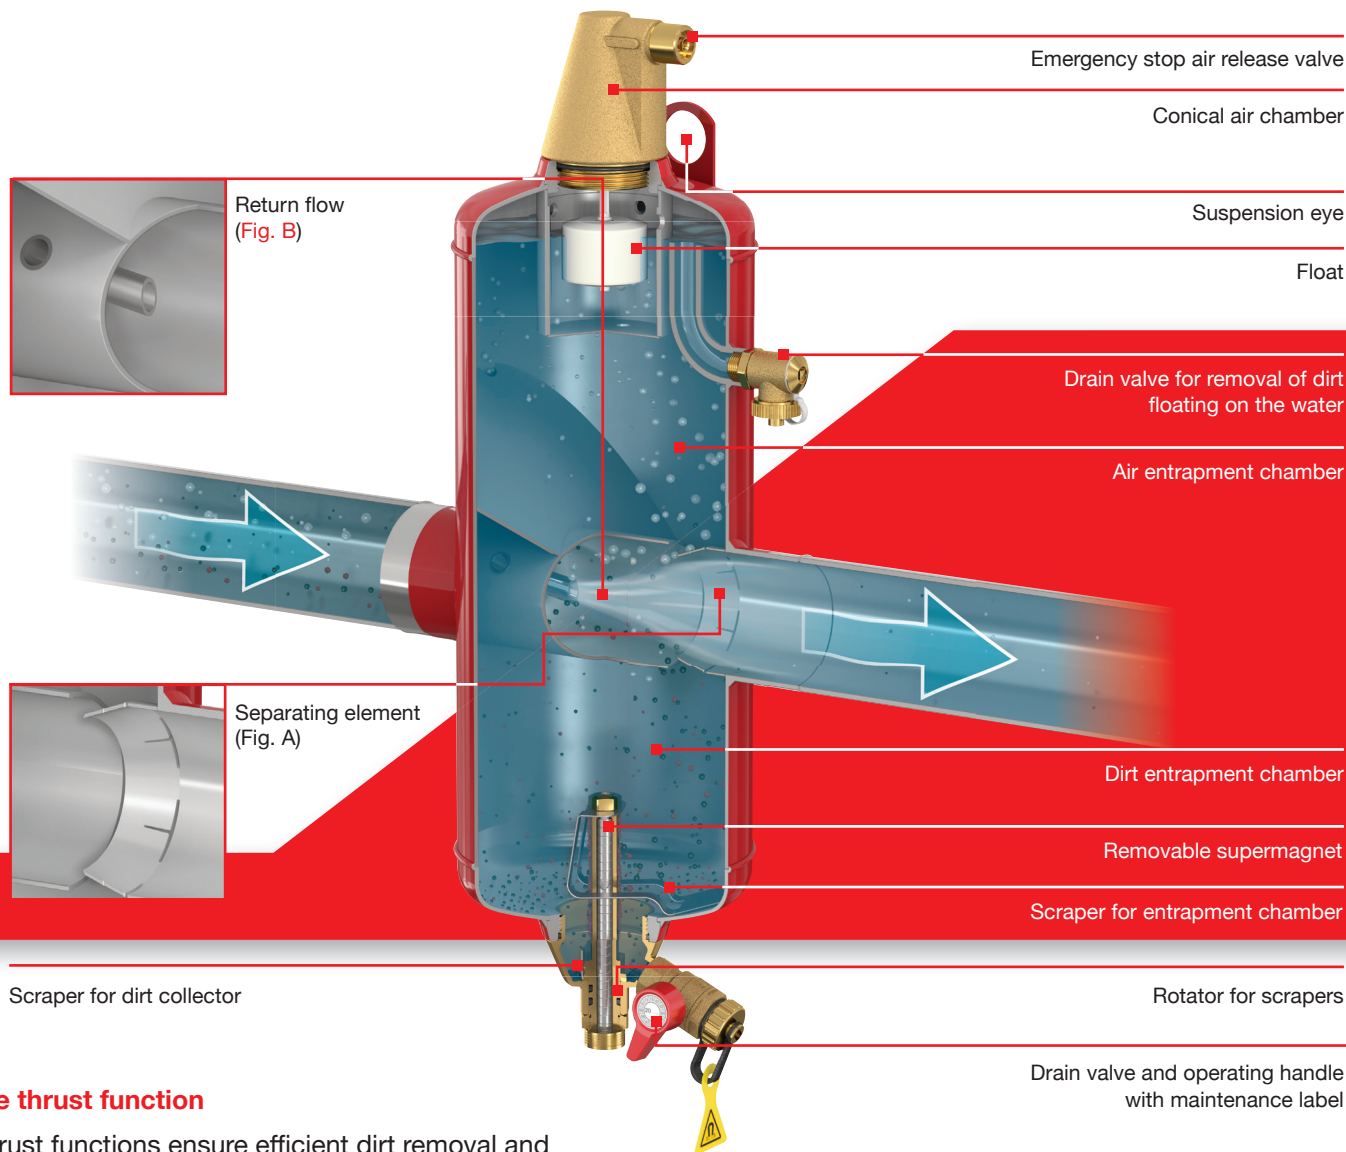

Double thrust function

Two thrust functions ensure efficient dirt removal and de-aeration of the system water.

Fig. A: The separating element in the path of the main flow diverts contaminated water into the entrapment chamber.

Fig. B: The return flow brings back the clean water from the center, upstream of the separating element. This forces the micro-bubbles and dirt particles present in the main flow outwards and into the chambers of the separator to be removed.

Supermagnets

There are 25 Neodymium supermagnets with a rating of 13,000 Gauss per magnet incorporated into the dirt scraper of the Flamcovent Clean Smart. Low flow velocity allows the magnets to trap even the smallest particles. By extracting the magnet, the magnetic particles are moved downwards, where two dirt scrapers and the drain valve are situated. This allows for easy and efficient removal of dirt.

optimal performance

Selection and Installation

Selection graphs

Thanks to the innovative design of the Smart series of Flamco air and dirt separators the pressure loss in the system is kept to a negligible minimum. Even at flow velocities of 9.8 f/s, the Smart series deliver the best performance in separation and pressure drop on the market.

The two graphs below are simple tools for selecting the correct model for your installation.


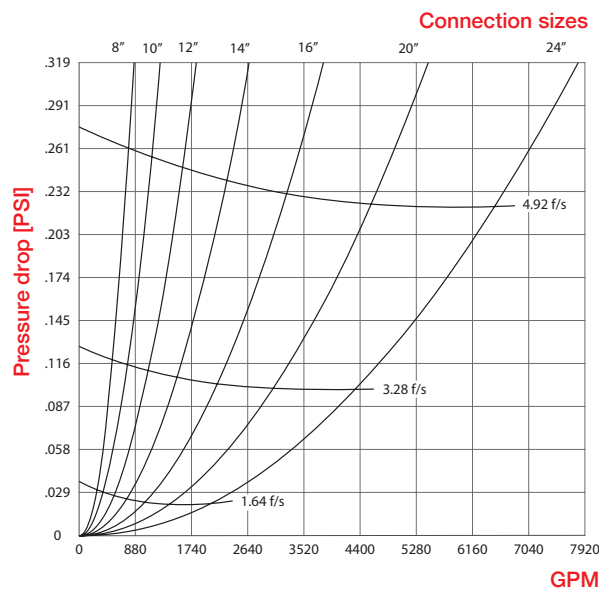
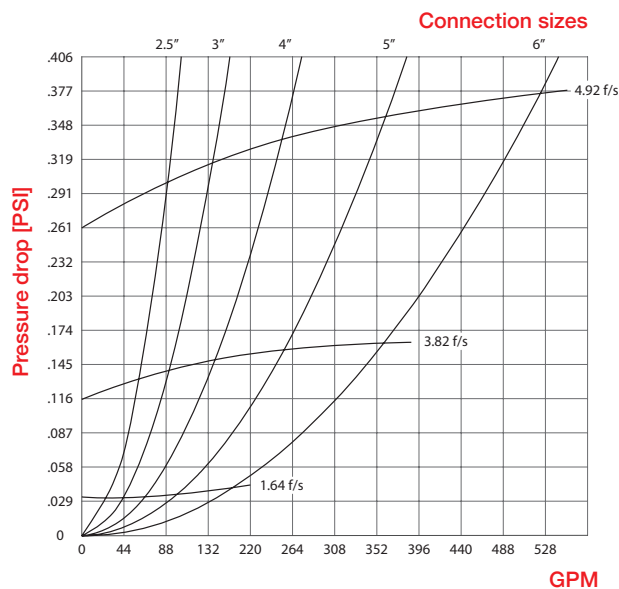


Fig. 1




Fig. 2




Fig. 3


Installation

The optimum location for the Flamcovent Clean Smart is immediately downstream of the boiler or mixing valve, and upstream of the circulation pump (1, 2). This traps bubbles produced immediately after heating the water. In a cooling system it is just before the chiller (3).

The separators are manufactured with a $\frac{3}{4}$ " connection. This enables the connection of any drain line when disposing of captured dirt.

Flamcovent Clean Smart

Type	Capacity [gallons]	Connection [in]	Dimensions				Cv	Weight [lbs]	ASME Part Number	NON-ASME Part Number
			A [in]	B [in]	C [in]	D [in]				
Flamcovent Clean Smart 65 F	2.6	2.5	23.74	13.78	13.11	6.89	162	35	FSADS250A	FSADS250N
Flamcovent Clean Smart 80 F	8.7	3	31.30	18.50	17.13	10.63	242	55	FSADS300A	FSADS300N
Flamcovent Clean Smart 100 F	8.7	4	31.30	18.50	17.13	10.63	360	64	FSADS400A	FSADS400N
Flamcovent Clean Smart 125 F	20.6	5	38.07	25.00	20.28	14.17	531	106	FSADS500A	FSADS500N
Flamcovent Clean Smart 150 F	20.6	6	38.07	25.00	20.28	14.17	780	115	FSADS600A	FSADS600N
Flamcovent Clean Smart 200 F	41.7	8	50.39	30.47	27.76	17.72	1549	176	FSADS800A	FSADS800N
Flamcovent Clean Smart 250 F	97.7	10	63.78	38.98	35.12	23.62	2257	348	FSADS1000A	FSADS1000N
Flamcovent Clean Smart 300 F	109.6	12	70.24	39.61	40.63	23.62	3272	406	FSADS1200A	FSADS1200N
Flamcovent Clean Smart 350 F	221.8	14	79.84	47.80	43.66	31.50	4721	708	FSADS1400A	FSADS1400N
Flamcovent Clean Smart 400 F	244.7	16	86.65	48.03	49.29	31.50	6782	767	FSADS1600A	FSADS1600N
Flamcovent Clean Smart 500 F	466.8	20	103.46	62.20	57.87	39.37	9696	1400	FSADS2000A	FSADS2000N
Flamcovent Clean Smart 600 F	806.8	24	122.99	73.62	69.17	47.24	13802	2123	FSADS2400A	FSADS2400N






advanced solutions

Continuous operation and a long service life


Flamco Smart performs 60% better than conventional air and dirt separators, while the flow resistance has been reduced to a negligible level. This avoids wear to the pump of the central heating boiler and reduces energy costs.

The absence of obstructions in the main flow ensures that clogging or blockage is prevented which guarantees superior and continuous operation over its service life. Moreover, this feature also considerably prolongs the service life of the product.

Performs 60% better

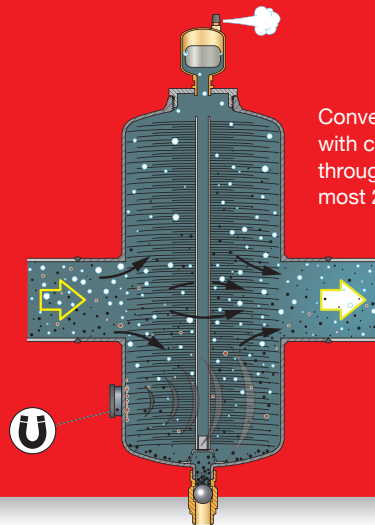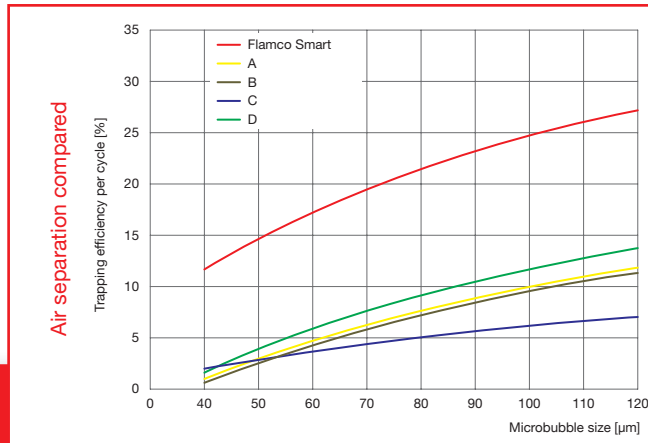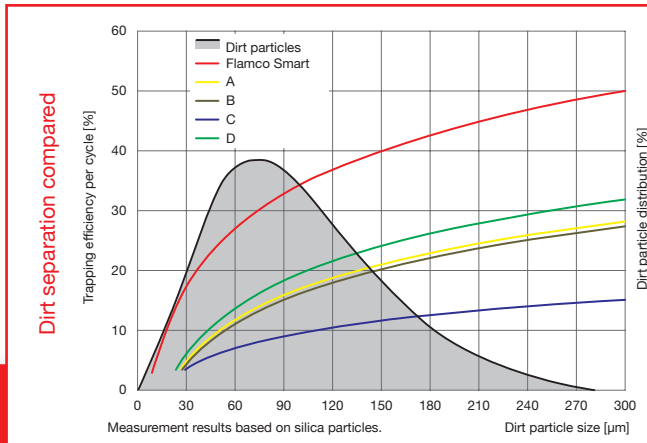


Conventional separator with complete flow through: separation of at most 25% per cycle.

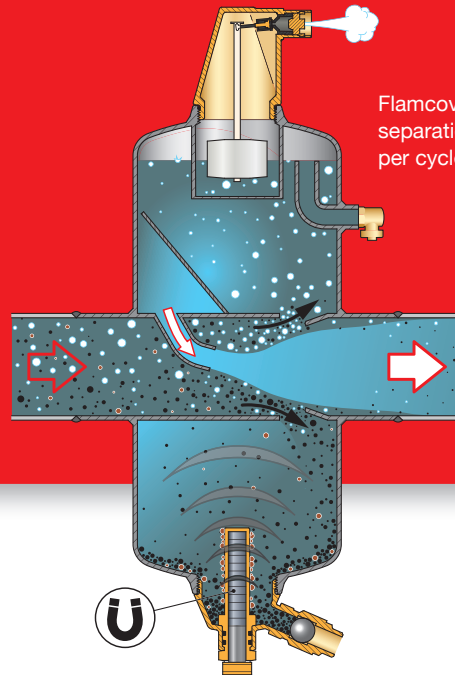

Flamcovent Clean Smart: separation of up to 40% per cycle.

Dirt scraper with magnet holder and drain valve

The removable dirt scraper consists of several parts: A double scraper, one for the base of the entrapment chamber and one in the cone of the dirt scraper itself. It has also a magnet holder with supermagnets. By pulling the magnet downwards, the magnetite particles are drawn to the underside of the dirt scraper where they can easily be removed via the drain valve. The removable magnet is designed to allow a minimum of space below the dirt separator when extracting.



Conical air chamber

The air chamber of the is conical in shape and fitted with an elongated float for extra distance to the venting valve. This reduces the chance of contamination of the valve seat to a minimum. Floating dirt particles collected in the upper entrapment chamber can be drained away periodically with the drain valve.



Flamco

Nexus

9982 E. 121st Street
Fishers, IN 46037

T 1.888.900.0947
F 1.800.900.8654
E info@nexusvalve.com
I www.nexusvalve.com

Flamco B.V.

PO Box 502
3750 GM Bunschoten
Amersfoortseweg 9
3751 LJ Bunschoten
The Netherlands

T +31 (0)33 299 75 00
F +31 (0)33 298 64 45
E info@flamco.nl
I www.flamcogroup.com

Flamco UK Ltd

Washway Lane
St Helens
Merseyside
WA10 6PB
United Kingdom

T +44 1744 744 744
F +44 1744 744 700
E info@flamco.co.uk
I www.flamcogroup.com

Flamco Middle East

PO Box 262636
Jebel Ali
Dubai
United Arab Emirates

T +971 4 881 95 40
F +971 4 881 95 60
E info@flamco-gulf.com
I www.flamcogroup.com