



FREE SPACE REQUIRED
FOR MAINTENANCE

FREE SPACE REQUIRED
FOR INSTALLATION

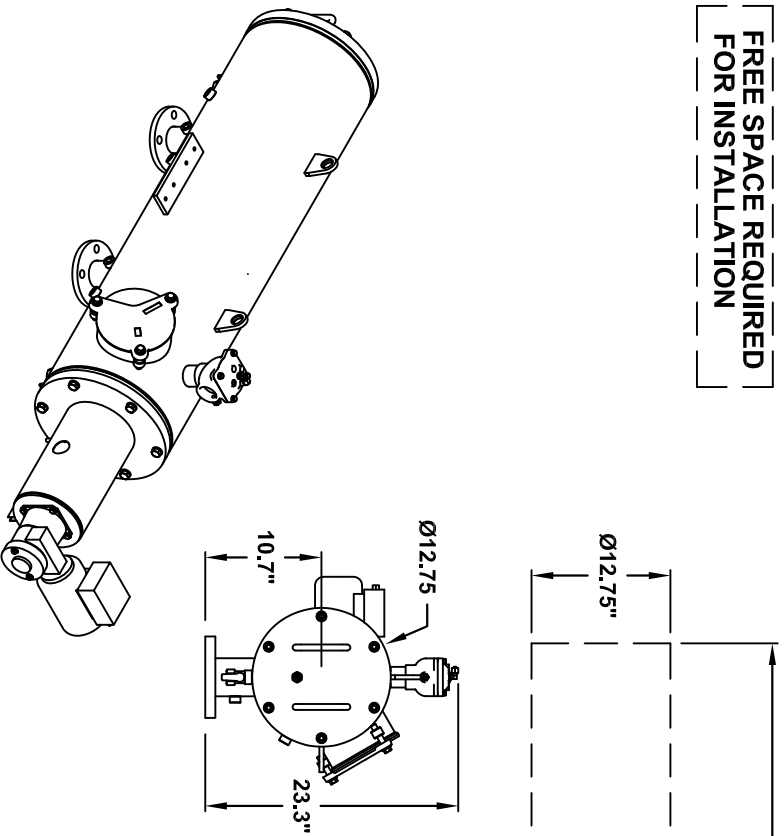

TECHNICAL DATA

MAXIMUM FLOW RATE:	350 G.P.M.
AVAILABLE SCREEN SIZES:	10, 25, 50, 80, 100, 150, 200, 400, 800, 1000, 1500 MICRON
OPEN SCREEN AREA:	390 SQ. INCHES
MAXIMUM WORKING PRESSURE:	150 PSIG
MINIMUM INLET PRESSURE REQUIRED DURING RINSE CYCLE	30 PSIG
MAX. WORKING TEMPERATURE:	150°F
INLET/OUTLET FLANGES:	3" ANSI 150#
DRAIN VALVE CONNECTION:	1-1/2"
DRAIN HEADER SIZE:	1-1/2" MINIMUM
DRIVE MOTOR RATING:	.33 HP, .22 KW, 1680 RPM
INPUT VOLTAGES TO CONTROLLER:	230V / 460V - 60 Hz - 3 Phase 380V - 50 Hz - 3 Phase
APPROXIMATE WEIGHT - DRY:	355 LBS.
APPROXIMATE SHIPPING WEIGHT:	500 LBS.

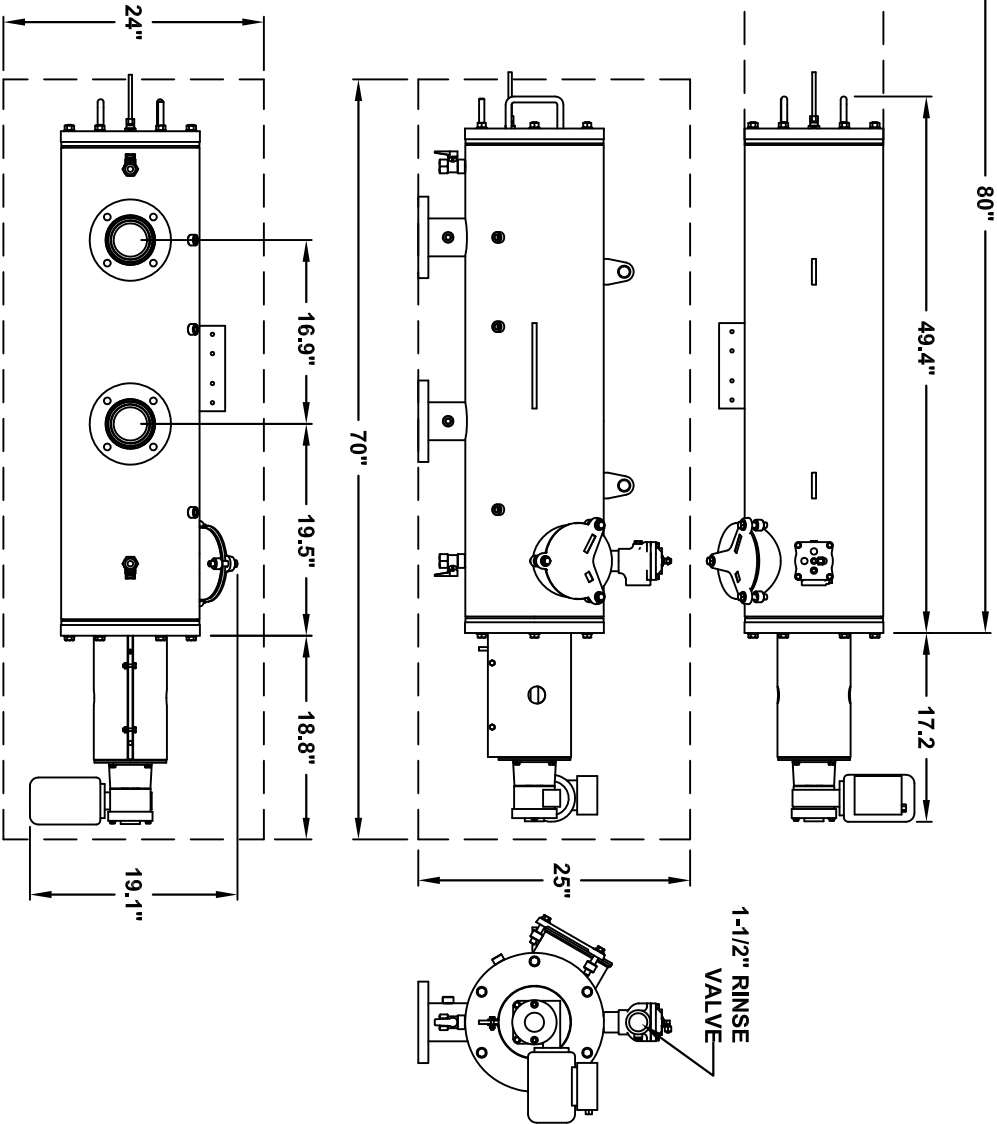

ALL DIMENSIONS IN INCHES UNLESS INDICATED

Green Tech reserves the right to modify filter dimensions without prior notice.

DATA SHEET

GTE-04-PS

AUTOMATIC SELF-CLEANING FILTER

JOHN DEERE
GREEN TECH

3 CHRYSLER
IRVINE, CA 92618

800-427-4079