




FREE SPACE REQUIRED
FOR MAINTENANCE

FREE SPACE REQUIRED
FOR INSTALLATION

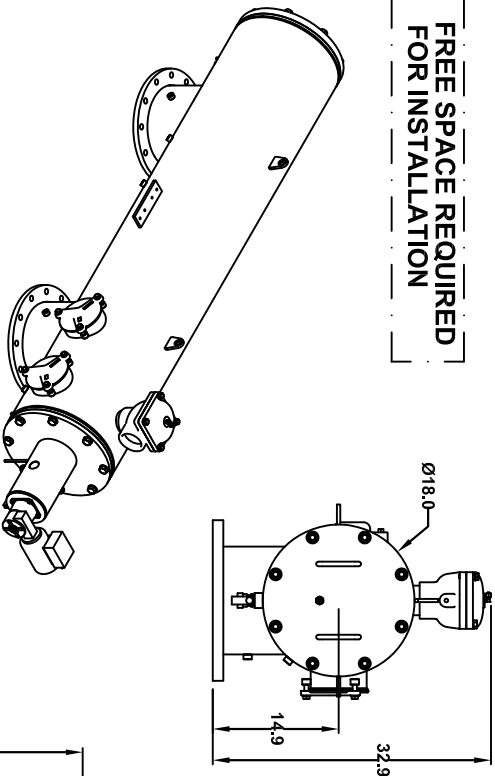

TECHNICAL DATA

MAXIMUM FLOW RATE:	3000 G.P.M.
AVAILABLE SCREEN SIZES:	10, 25, 50, 80, 100, 150, 200, 400, 800, 1000, 1500 MICRON
OPEN SCREEN AREA:	1560 SQ. INCHES
MAXIMUM WORKING PRESSURE:	150 PSIG
MINIMUM INLET PRESSURE REQUIRED DURING RINSE CYCLE	30 PSIG
MAX. WORKING TEMPERATURE:	150°F
INLET/OUTLET FLANGES:	12" ANSI 150#
DRAIN VALVE CONNECTION:	3"
DRAIN HEADER SIZE:	3" MINIMUM
DRIVE MOTOR RATING:	1/2 HP, TEFC
INPUT VOLTAGES TO CONTROLLER:	110-120 Vac - 60 Hz - 1 Phase 220-240 Vac - 50 Hz - 1 Phase
APPROXIMATE WEIGHT - DRY:	880 LBS.
APPROXIMATE SHIPPING WEIGHT:	1160 LBS.
APPROXIMATE WEIGHT FULL OF WATER:	1555 LBS.

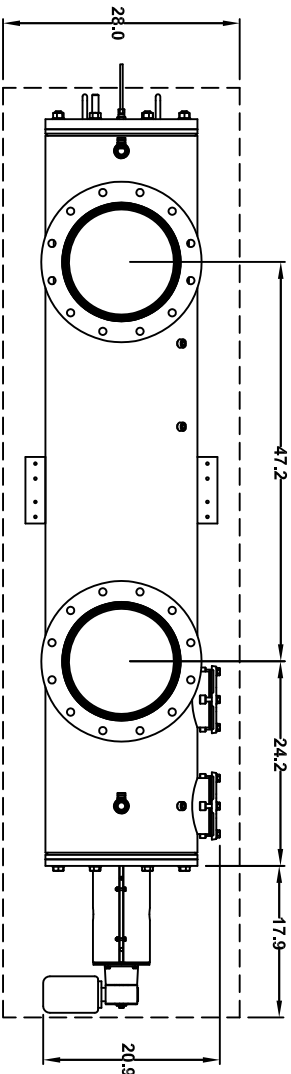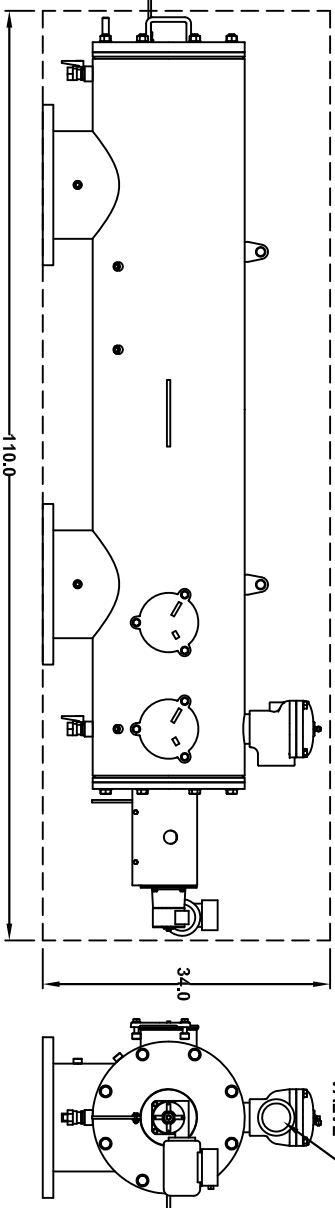

ALL DIMENSIONS IN INCHES UNLESS INDICATED

John Deere Green Tech reserves the right to modify filter dimensions without prior notice.

DATA SHEET

GTE-12-PE

AUTOMATIC SELF-CLEANING FILTER

JOHN DEERE

GREEN TECH

3 CHRYSLER
IRVINE, CA 92618