


FREE SPACE REQUIRED  
FOR MAINTENANCE

ALL DIMENSIONS IN INCHES UNLESS INDICATED

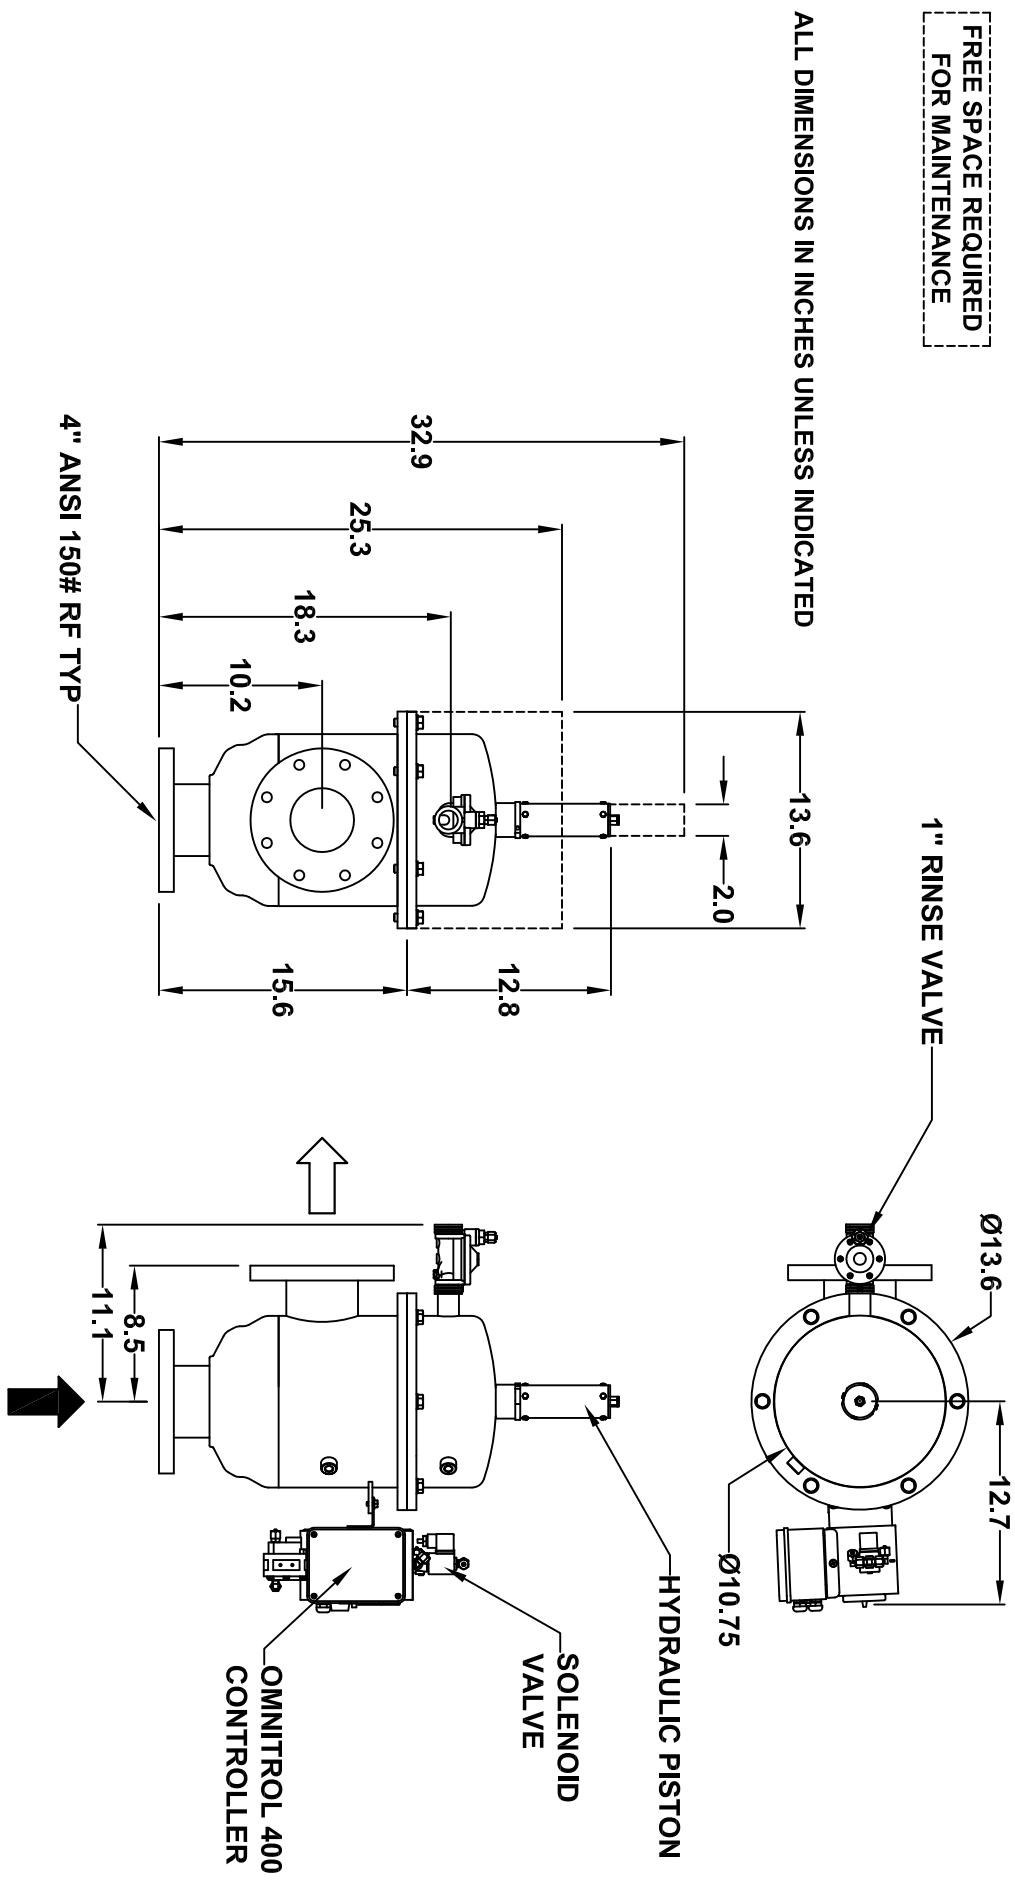

## TECHNICAL DATA

|   |   |
|---|---|
| MAXIMUM FLOW RATE:  | 350 G.P.M.  |
| AVAILABLE SCREEN MICRON SIZES:                            | 5, 10, 15, 25, 30, 40, 50, 80, 100, 120, 150, 200, 400, 800, 1000, 1500, 3000 |
| OPEN AREA STD. SCREEN:                                    | 120 SQ. INCHES  |
| OPEN AREA HIGH PERFORMANCE SINTERED MULTI-LAYERED SCREEN: | 180 SQ. INCHES  |
| MAXIMUM WORKING PRESSURE:                                 | 150 PSIG  |
| MINIMUM INLET PRESSURE REQUIRED DURING RINSE CYCLE:       | 30 PSIG   |
| MAX. WORKING TEMPERATURE:                                 | 150°F   |
| INLET/OUTLET CONNECTIONS:                                 | 4" ANSI 150# RF   |
| DRAIN VALVE CONNECTION:                                   | 1" FEMALE   |
| DRAIN HEADER SIZE:  | 1" MINIMUM  |
| APPROX. EMPTY WEIGHT:                                     | 95 LBS.   |
| APPROX. FULL OF WATER WEIGHT:                             | 130 LBS.  |

## DATA SHEET

**GTV-040-LS**



**JOHN DEERE**  
GREEN TECH