


FREE SPACE REQUIRED  
FOR MAINTENANCE

ALL DIMENSIONS IN INCHES UNLESS INDICATED

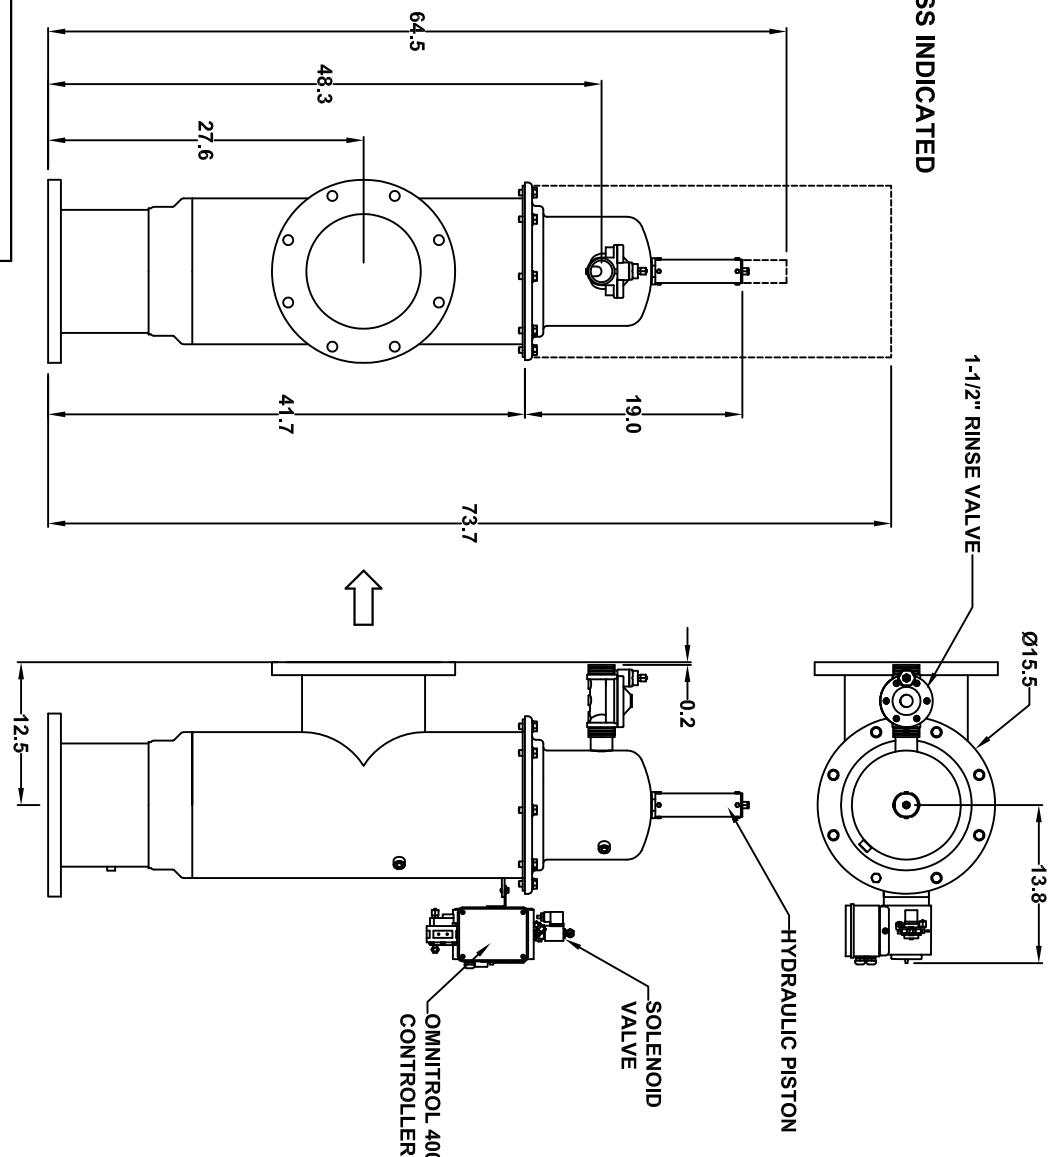

## TECHNICAL DATA

MAXIMUM FLOW RATE:	1320 G.P.M.
AVAILABLE SCREEN MICRON SIZES:	5, 10, 15, 25, 30, 40, 50, 80, 100, 120, 150, 200, 400, 800, 1000, 1500, 3000
OPEN AREA STD. SCREEN:	648 SQ. INCHES
OPEN AREA HIGH PERFORMANCE SINTERED MULTI-LAYERED SCREEN:	972 SQ. INCHES
MAXIMUM WORKING PRESSURE:	150 PSIG
MINIMUM INLET PRESSURE REQUIRED DURING RINSE CYCLE:	30 PSIG
MAX. WORKING TEMPERATURE:	150°F
INLET/OUTLET CONNECTIONS:	8" ANSI 150# RF
DRAIN VALVE CONNECTION:	1-1/2" FEMALE
DRAIN HEADER SIZE:	1-1/2" MINIMUM
APPROX. EMPTY WEIGHT:	290 LBS.
APPROX. FULL OF WATER WEIGHT:	475 LBS.

## GTV-10- LS

## DATA SHEET

**JOHN DEERE**

**GREEN TECH**

3 CHRYSLER  
IRVINE, CA 92618