


TECHNICAL DATA

MAXIMUM FLOW RATE:	600 G.P.M.
AVAILABLE SCREEN SIZES:	10, 25, 50, 80, 100, 120, 150, 200, 400, 800, 1000, 1500 MICRON
OPEN SCREEN AREA:	930 SQ. INCHES
MAXIMUM WORKING PRESSURE:	150 PSIG
MINIMUM INLET PRESSURE REQUIRED DURING RINSE CYCLE	30 PSIG
MAX. WORKING TEMPERATURE:	150°F
INLET/OUTLET FLANGES:	6" ANSI 150#
DRAIN VALVE CONNECTION:	2"
DRAIN HEADER SIZE:	2" MINIMUM
APPROXIMATE WEIGHT - DRY:	600 LBS.
APPROXIMATE SHIPPING WEIGHT:	725 LBS.

ALL DIMENSIONS IN INCHES UNLESS INDICATED


FREE SPACE REQUIRED FOR MAINTENANCE

FREE SPACE REQUIRED FOR INSTALLATION

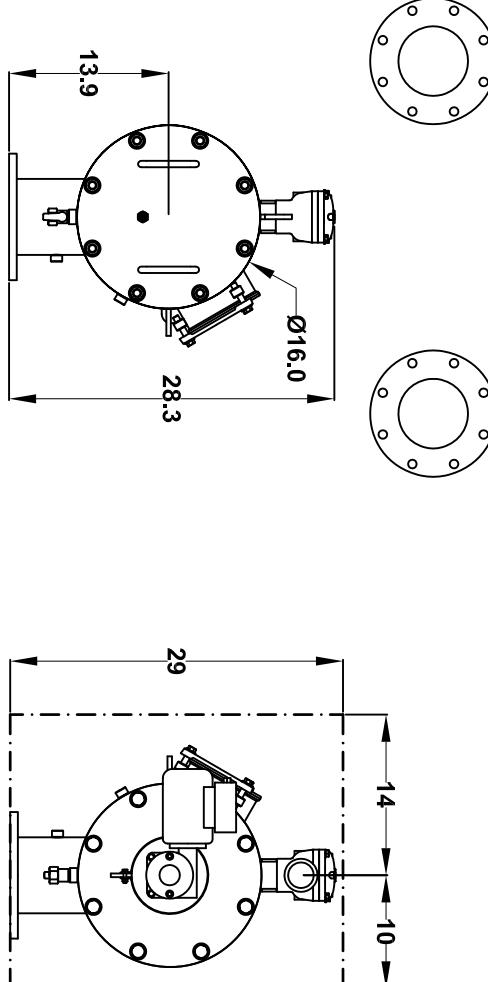

FREE SPACE REQUIRED FOR MAINTENANCE

FREE SPACE REQUIRED FOR INSTALLATION

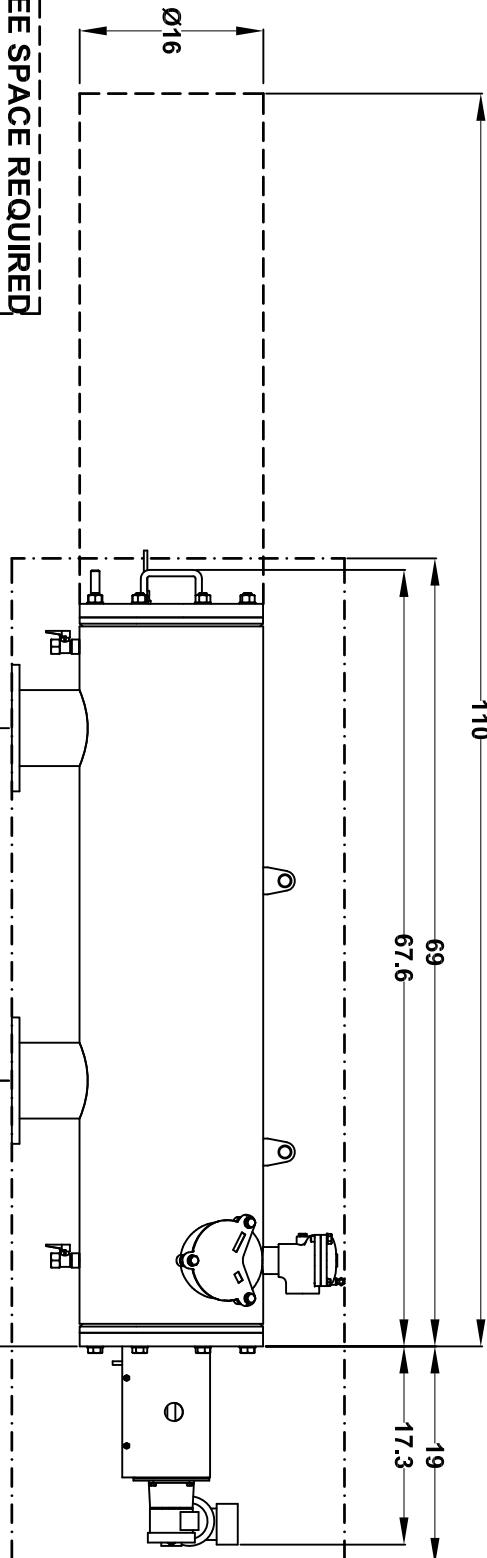

GTE-04-PE

DATA SHEET

AUTOMATIC SELF-CLEANING FILTER